




For Sales Information:
sales@serialcables.com
(303)495-2320
<http://www.serialcables.com>



24-port Direct Attach JBOD

- 24, 2.5" drive trays that will fit any width 2.5" HDD/SSD in a 2u height, 19" rack mountable chassis.
- Individual LED activity light on each tray (light pipe from backplane)
- 12Gb/s backplane using SFF-8680 drive connectors and SFF-8643 internal HD MiniSAS receptacles.
- External connection is SFF-8644 HD MiniSAS receptacles
- Available as a direct attach storage enclosure or it can be configured with either one or two, 48 port, 12Gb/s SAS expanders for high availability storage applications.
- Redundant power supplies

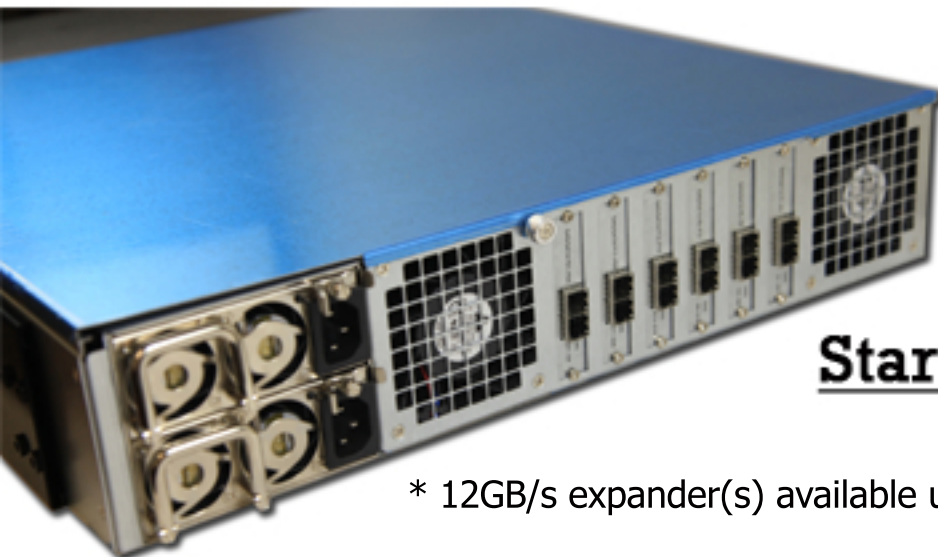

Starting from \$2,695.00

* 12GB/s expander(s) available upon request



For Sales Information:
sales@serialcables.com
(303)495-2320
<http://www.serialcables.com>

Power Supply Specifications:

- The Output Current of 5V & 3.3V not exceed 43A *Total output power not exceed 500w
- Active PFC (full range), MEET IEC-1000-3-2 CLASS D
- 12V Max. Current : 32A
- TEMPERATURE RANGE : OPERATING 0°C ~ 40°C, STORAGE -20°C ~ 70°C
- HUMIDITY:OPERATING:20%-95%, NON-OPERATING:10%-95%
- 85% is normal condition and 95% is with special coating process
- DUAL EMI NOISE INLET FILTER: FCC CLASS B, CISPR22 CLASS B
- SAFETY: UL 1950, CSA 22.2 NO/ 950, TUV IEC 950
- HOT-SWAPPABLE / HOT-PLUGGABLE REDUNDANCY FUNCTION
- Use 48-pins industrial connectors
- Cooling: TWO 38x38x28 mm DC FANS (MODULE)
- AC Inlet in each module

Serial Cables, LLC
8250 Park Meadows Dr
Suite 100
Lone Tree, CO 80124
(303)495-2320
sales@serialcables.com
<http://www.serialcables.com>