



RoHS

REV.	REMARK	DATE	SIGN.

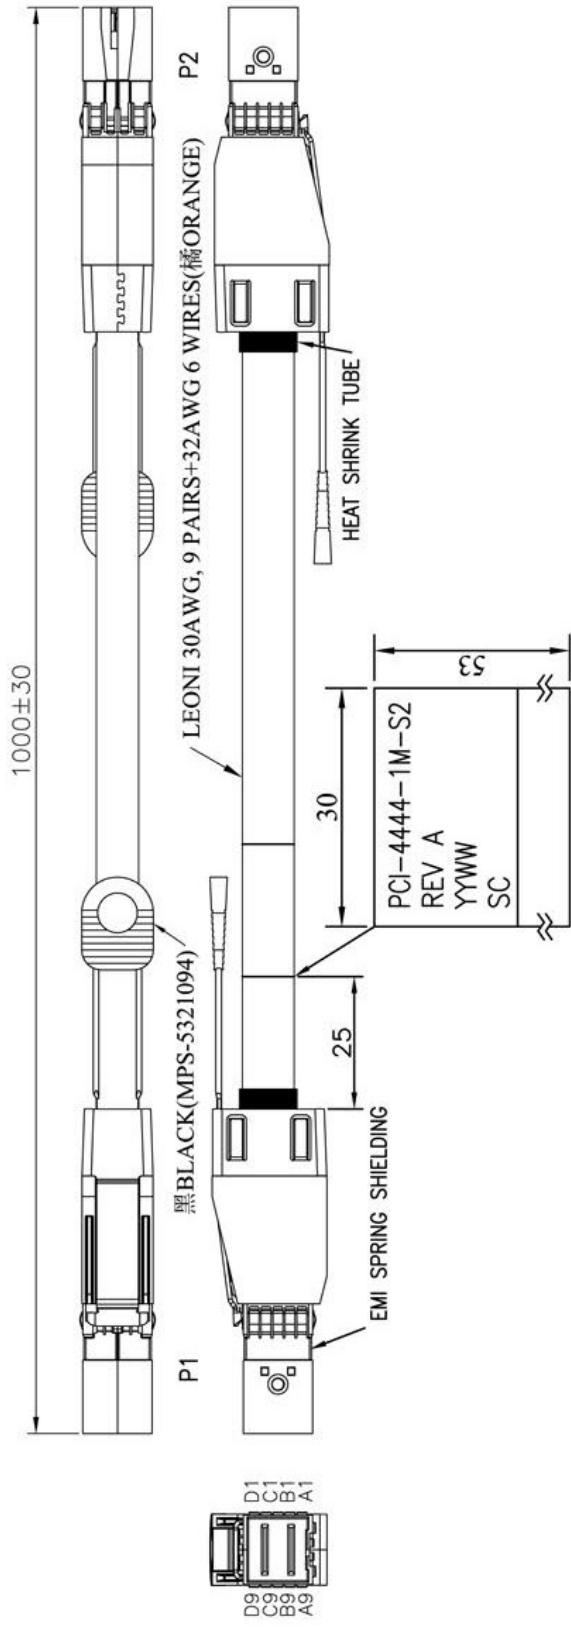

MATERIAL RoHS COMPLIANT:
 1. CABLE SPEC (LEONI ParaLink):
 9 PAIRS + 6 WIRES
 (1) 9 PAIRS/30AWG SILVER PLATED COPPER
 (2) 6 WIRES/32AWG TINNED COPPER
 OVERALL SHIELD
 (1) ALUMINATE FOIL OVERLAPPED
 (2) TINNED COPPER BRAID, 85% COVERAGE
 DIAMETER: 7.6±0.3mm
 JACKET: PVC, COLOR: ORANGE
 ELECTRICAL:
 IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)
 PRINT LEGEND: "LEONI High Speed Cables ParaLink®"
 100Q 9pairs 30AWG+ 6x32AWG "internal lot number"
 *sequential length in metres"

2.CONNECTOR:
 P1,P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: 6 LAYERS, GOLD PLATING ON CONTACT PADS.
 (MPCB-060003LF REV.A / MPCB-060004LF REV.A)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLACK(MPS-5321094)
 (5) EMI SPRING SHIELDING




3. LABELING ON BAG:



DESC.	MiniSASHD 4x with Sideband Cable Assembly		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
	P/N	B-5158	CUSTOMER P/N	PCI-4444-1M-S2	Sino	DATE	07/08/15	DWG NO:	DWG\B\5158	

1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

WIRING DIAGRAM 客製化接點

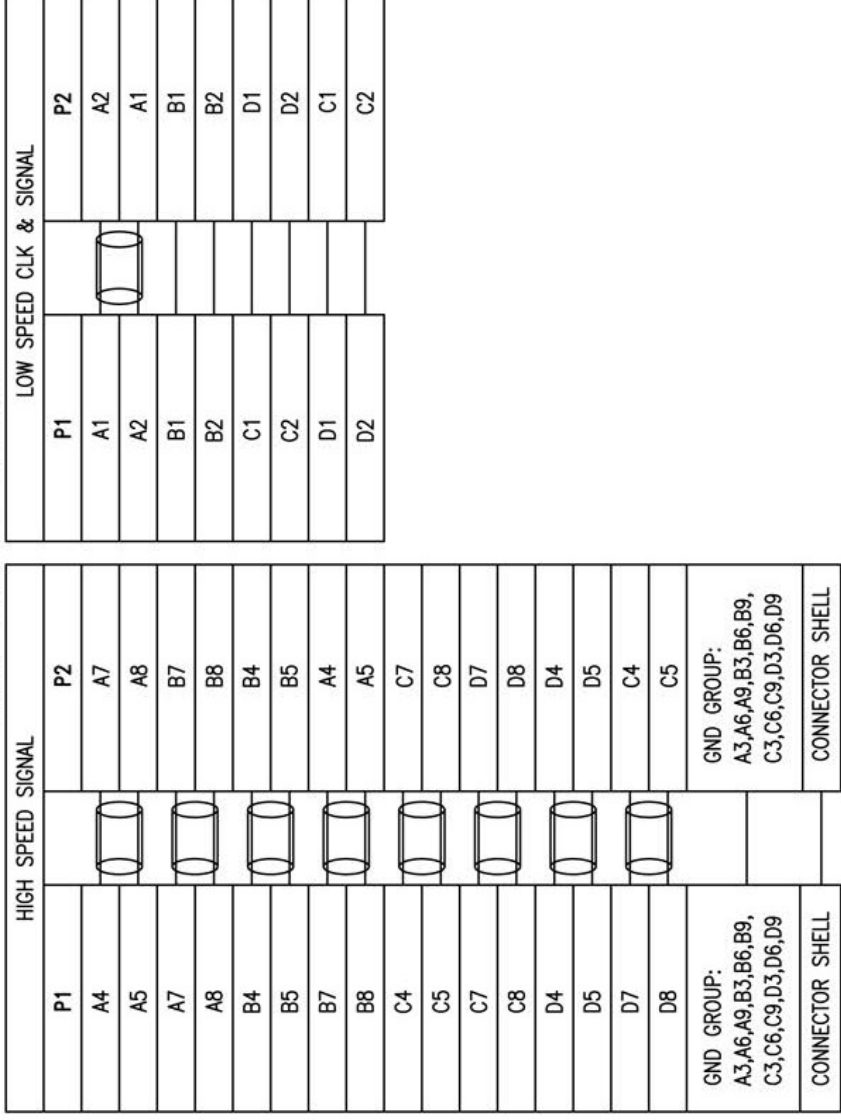

DESC.	MiniSASHD 4x with Sideband Cable Assembly		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	B-5158	CUSTOMER P/N	PCI-4444-1M-S2		Sino	*	DATE	07/08/'15	DWG NO:	DWG\B\5158

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---