


RoHS

REV.	REMARK	DATE	SIGN.

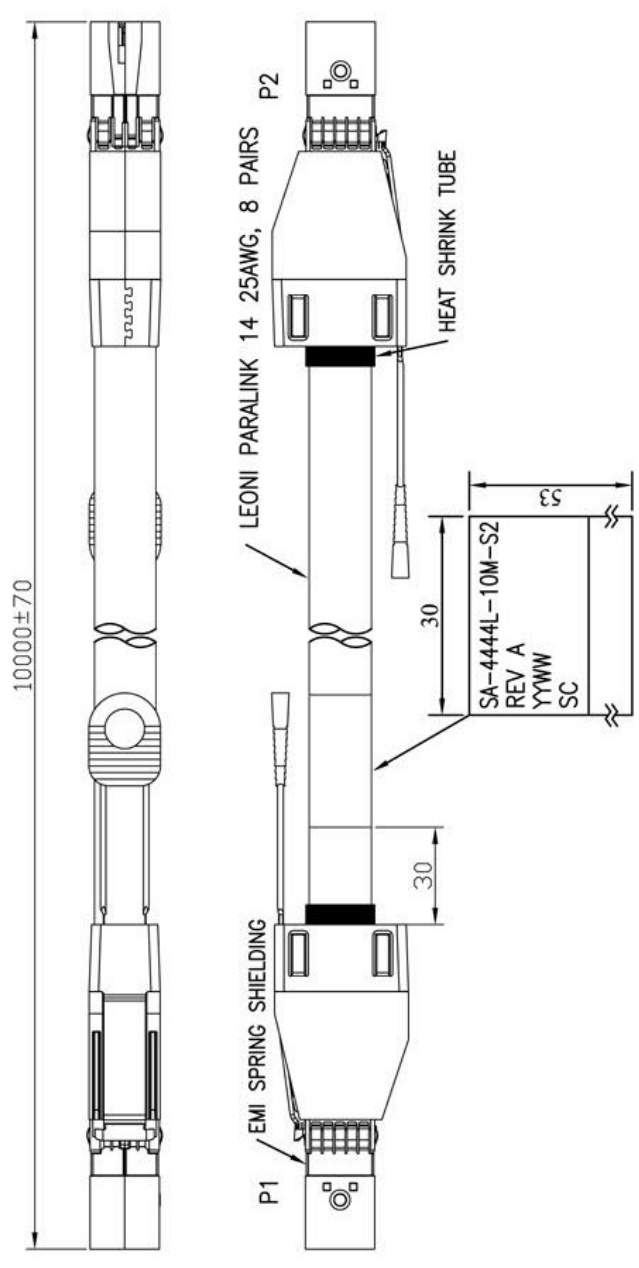

MATERIAL RoHS COMPLIANT:

1.CABLE:
 CONDUCTOR: 25AWG SOLID SILVER PLATED COPPER.
 INSULATION: SKIN-FOAM-SKIN
 PAIR: 2 WIRES, WH AND YE PARALLEL.
 CORE: 8 PAIRS
 PAIR DRAIN WIRE: Ø0.4mm (26AWG) TINNED COPPER.
 PAIR SHIELD: ALUMINUM FOIL OVERLAPPED, ALU INSIDE.
 INNER SHIELD: ALUMINUM FOIL OVERLAPPED, APPLIED LONGITUDINALLY.
 OUTER SHIELD: TINNED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 9.4 ± 0.3 mm
 PRINT LEGEND: "LEONI High Speed Cable ParaLink®-14
 1000 Pairs, 25AWG (SHIELDED)(UL) E116441 CL2 75°C"
 DIFFERENTIAL IMPEDANCE: 100±5 OHM.

2.CONNECTOR:
 P1,P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON
 (P/N: MPCB-040117LF REV.A / SPCB-040118A)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLUE.
 (5) EMI SPRING SHIELDING

3.TWO-WIRED SERIAL MEMORY: ATMEL AT24C02B EEPROM (256 BYTES).
 4.NO GUARANTEE, NO TESTING REPORT AVAILABLE.

5.LABELING ON BAG:


SA-4444L-10M-S2
 Made in Taiwan

60



DESC.	Mini SAS HD 4x/Mini SAS HD 4x CABLE ASS'Y	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	UASS-RC007062	CUSTOMER P/N	SA-4444L-10M-S2	Sino					
						DATE	11/17/14	DWG NO:	DWG\RC\7062

WIRING DIAGRAM

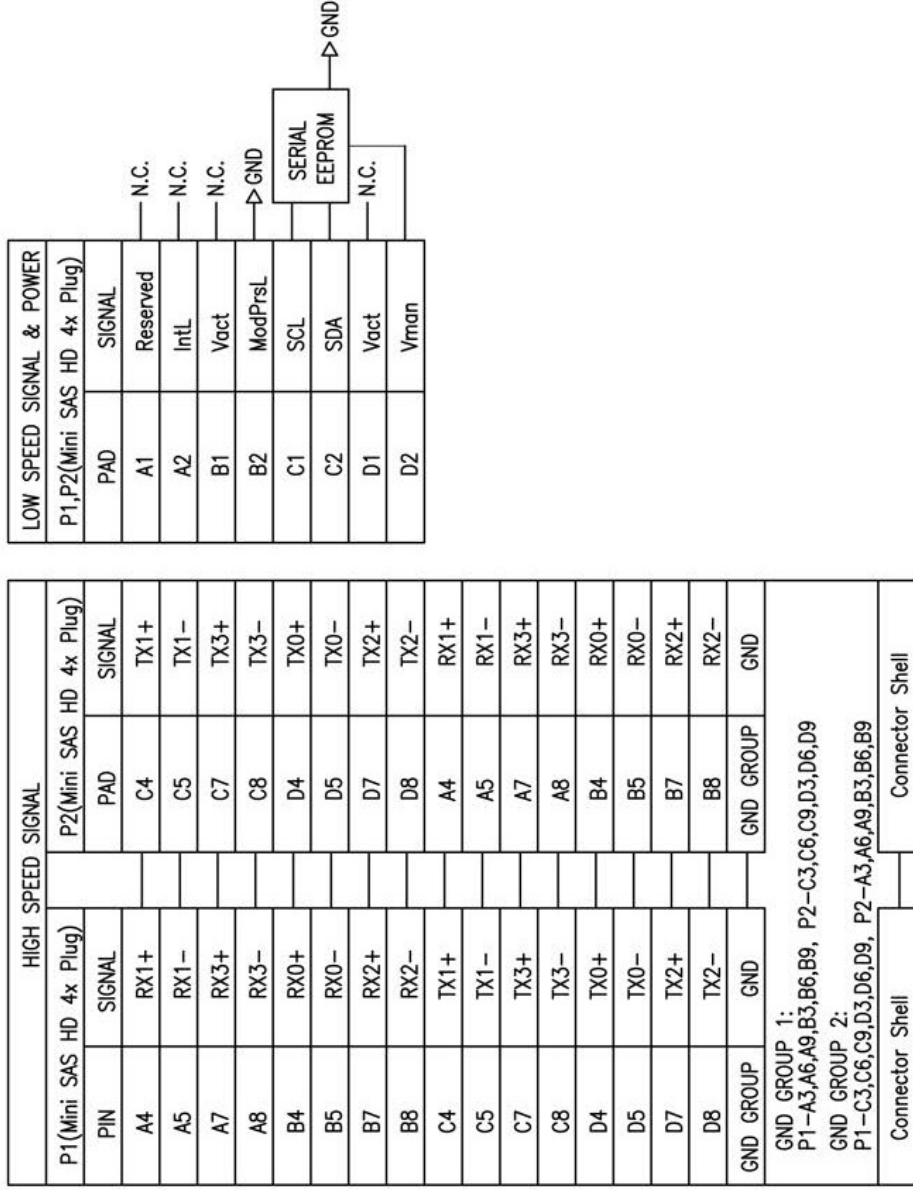

DESC.	Mini SAS HD 4x/Mini SAS HD 4x CABLE ASS'Y	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	* DATE 11/17/14	UNIT	mm
P/N	UASS-RC007062			Sino	*				DWG NO: DWG/RC/7062