


RoHS

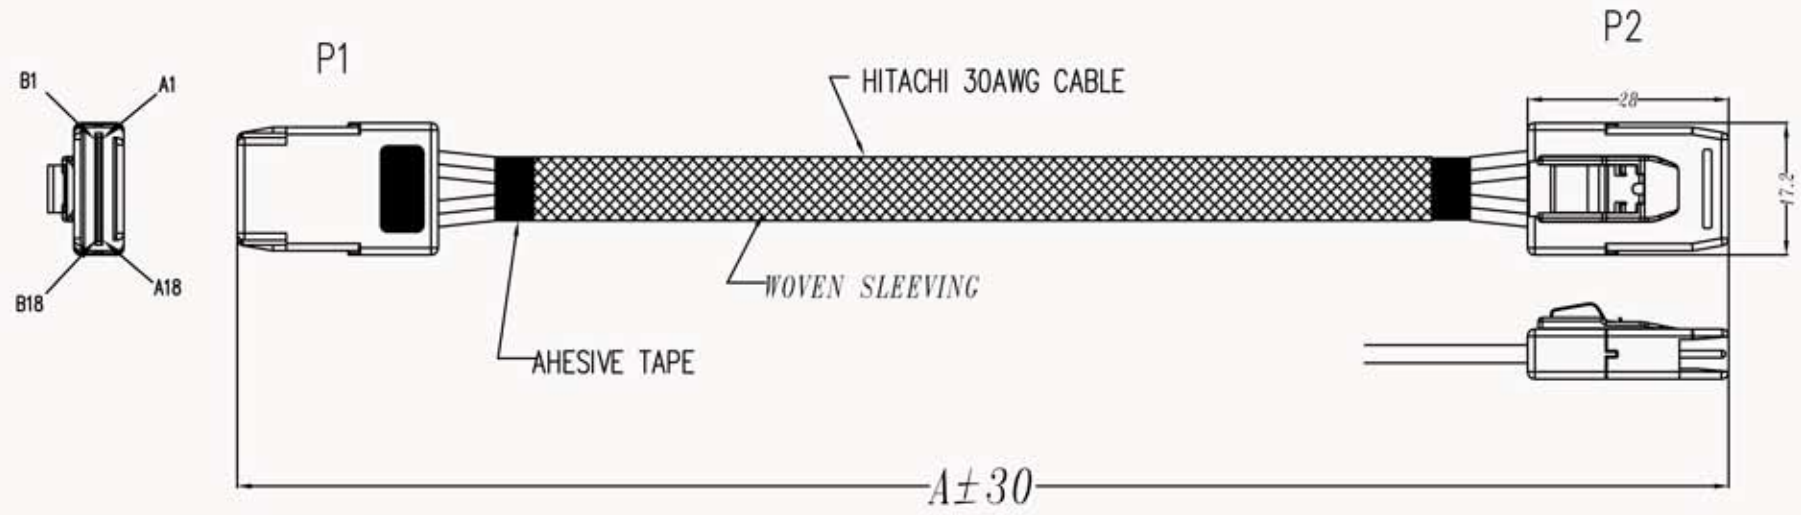

MATERIAL RoHS COMPLIANT:  
CABLE:

ELECTRICAL:

DIFFERENTIAL IMPEDANCE TDR: 100+/-5 OHMS

CAPACITANCE: 47 pF/m nom

SKEW(within the pair-3m sample): 8 ps/m max

COMPONENT:

CONDUCTOR: 30 AWG SOLDER TINNED COPPER  
.010" NOM OD

APPROVALS:

UL AWM VW-1 80°C 30V, RoHS COMPLIANT

CONNECTOR:

P1&P2: Mini SAS 4i CABLE PLUG - 36CKT CONNECTOR.

- (1) HOOD: NYLON, UL94-V0
- (2) P.C.B: FR4, 4 LAYERS
- (3) LATCH: STAINLESS

- 1. SA-8787-1M A=1000mm
- 2. SA-8787-2M A=2000mm



P/N: SA-8787-H2T

Desc. : Int. MiniSAS (SFF-8087) - Int. MiniSAS (SFF-8087)  
Host to Target wired

Drawings are property of Serial Cables, LLC and for information purposes only. Do Not Edit or Copy