


REV.	REMARK	DATE	SIGN.

RoHS

1000±30

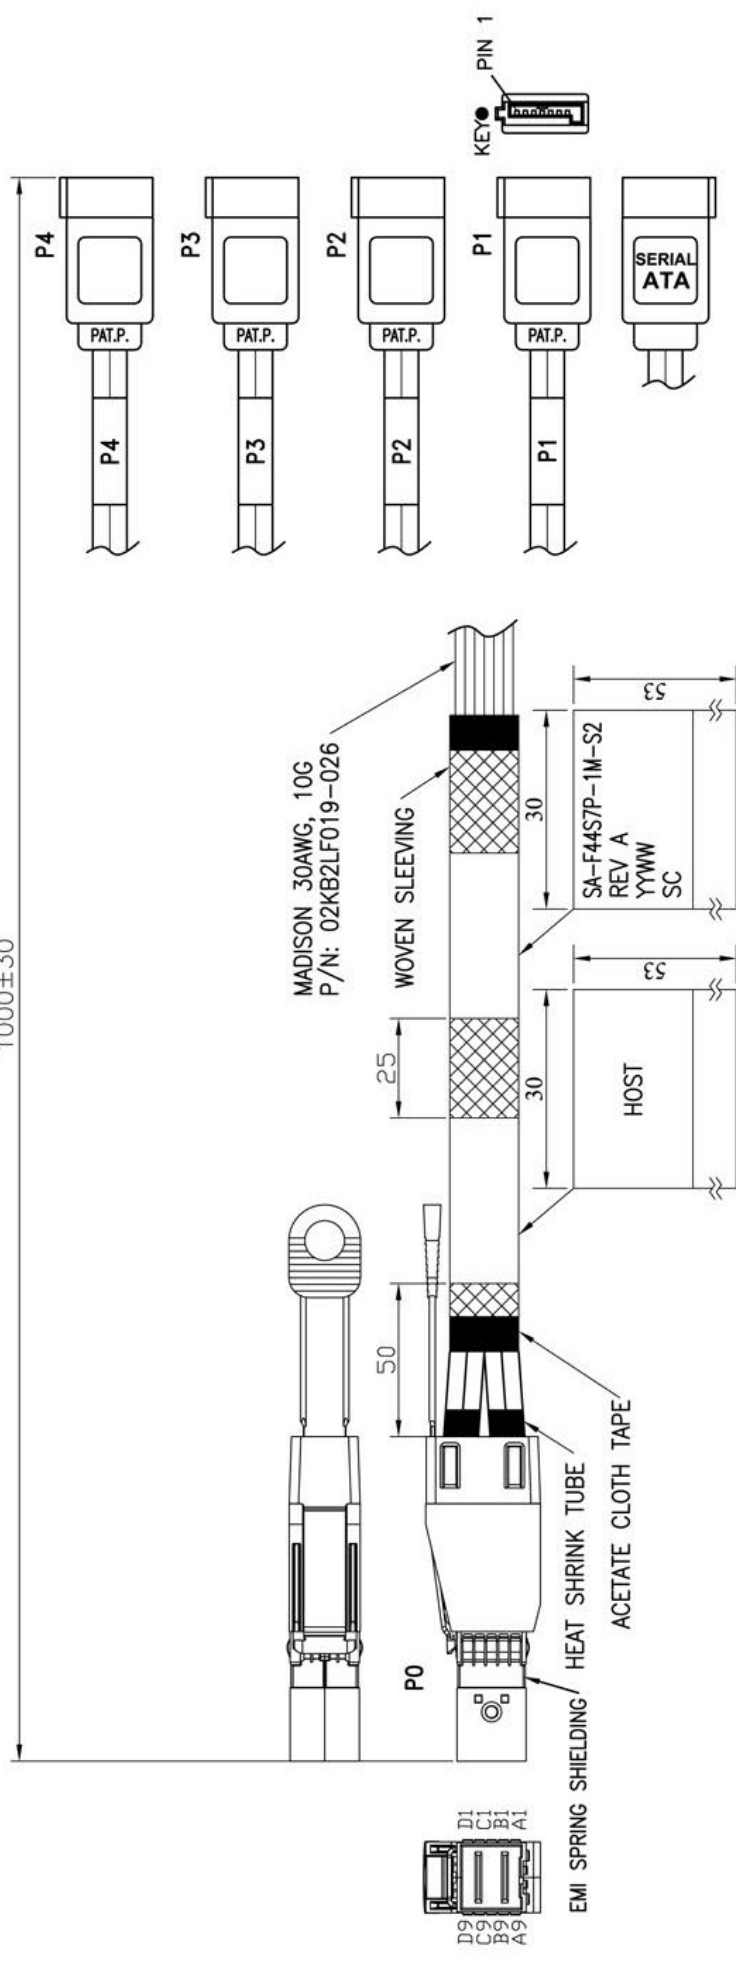


MATERIAL RoHS COMPLIANT:

1. CABLE:
 CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER.
 INSULATION: FOAM POLYOLEFIN.
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 PAIR DRAIN WIRE: 30AWG SOLID TIN PLATED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE.
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 UL RECOGNIZED: AWM STYLE 21490 80°C 30 VOLTS.


2. CONNECTOR:
 P0: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON
 (P/N: MPCB-040113LF REV A / SPCB-040114A)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLUE.
 (5) EMI SPRING SHIELDING
 P1~P4: SATA 7P INTERNAL CABLE REC.
 3.FOR SAS 6.0 Gbps.
 4.TWO-WIRED SERIAL MEMORY: ATMEL AT24C02B EEPROM (256 BYTES).

5.LABELING ON BAG:



DESC.	Mini SAS HD 4x/4*SATA CABLE ASS'Y	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	UASS-RC006432			Sino		DATE	10/15/13	DWG NO:	DWG\RC\6432

WIRING DIAGRAM

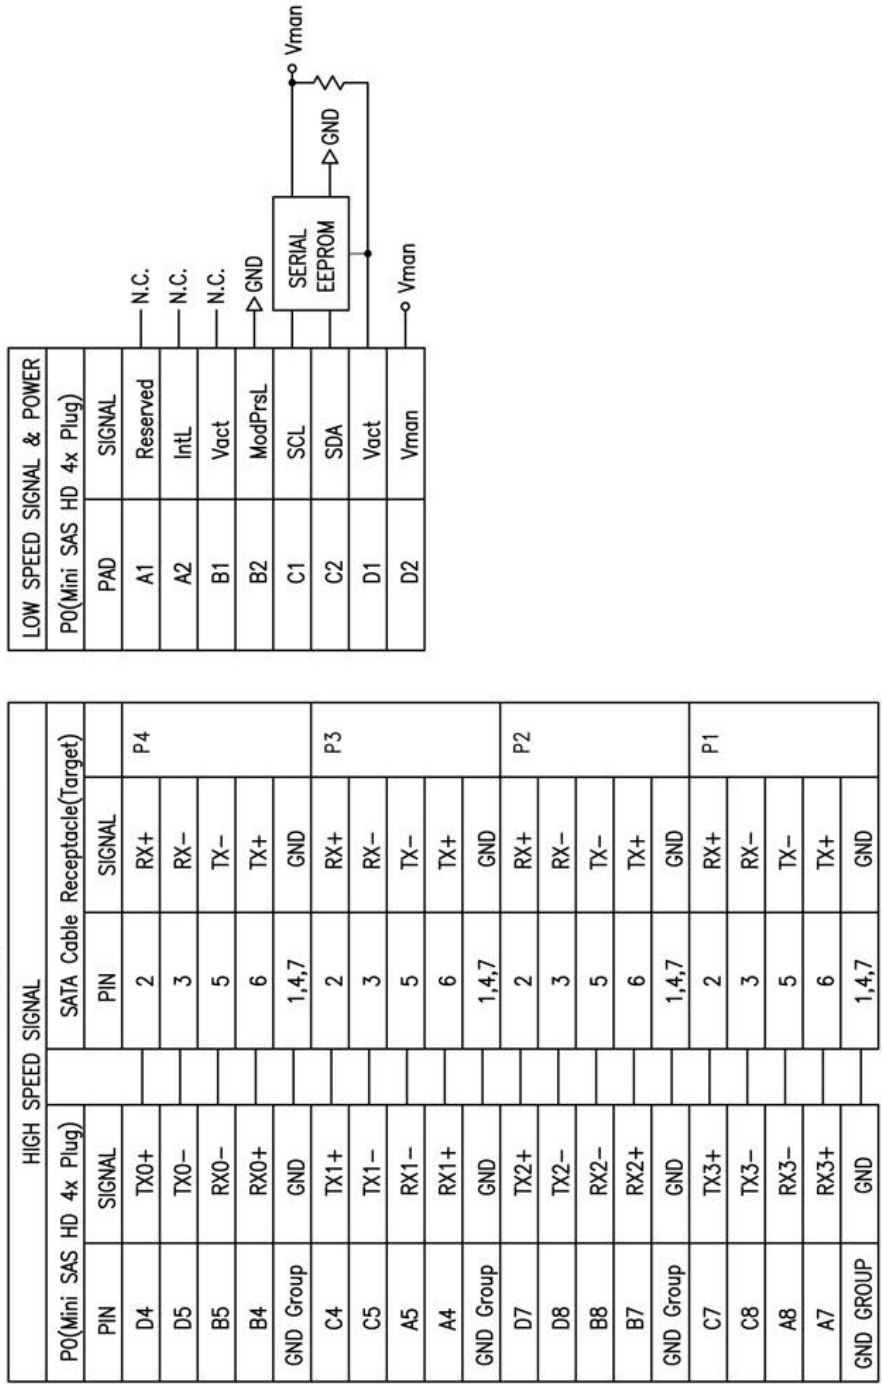

GND GROUP:
A3,A6,A9,B3,B6,B9,
C3,C6,C9,D3,D6,D9.



DESC.	Mini SAS HD 4x/4*SATA CABLE ASS'Y
P/N	UASS-RC006432 CUSTOMER P/N

APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
		Sino	*	DATE	08/28/13	DWG NO:	DWG\RC\6432