

# Serial Cables, LLC

## SI TEST REPORT


### Test Description

订单号 (PO)		长度 (Length)	0.3M	测试标准(Testing Standard)	PCIE6.0
型号 (Model Number)	MCIO6-8X-2CEMX4	测试员 (Tester)	He Qiang	检测日期(Test Date)	2024/9/2
设备型号(Device Model)	Keysight E5080B-53g				

### Test Results


#### Differential Impedance TDD11

FRQ.(Ohm)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
MAX	97.75	89.03	88.74	88.61	89.80	88.62	89.29	90.10	90.73
MIN	72.25	80.08	82.16	84.61	83.27	84.45	85.78	85.42	85.83
Result		Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

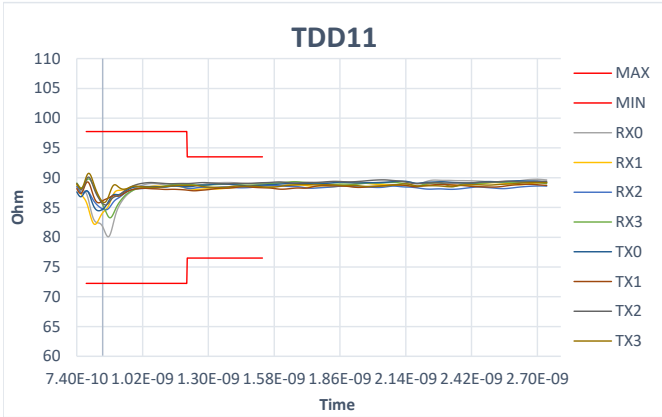


#### Differential Impedance TDD22

FRQ.(Ohm)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
MAX	97.75	89.36	89.83	88.38	89.07	88.60	88.21	88.68	88.29
MIN	72.25	80.17	79.62	80.76	80.16	77.21	77.17	77.01	77.49
Result		Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

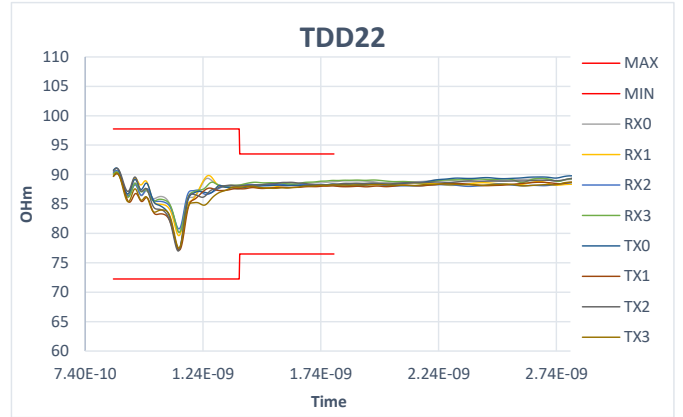


#### Insertion Loss SDD21

FRQ.(GHz)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
8G	-4.50	-2.98	-2.78	-2.90	-3.03	-2.92	-3.14	-2.97	-2.96
16G	-7.00	-4.77	-4.45	-4.62	-4.57	-4.70	-5.12	-4.56	-4.64
Result		Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

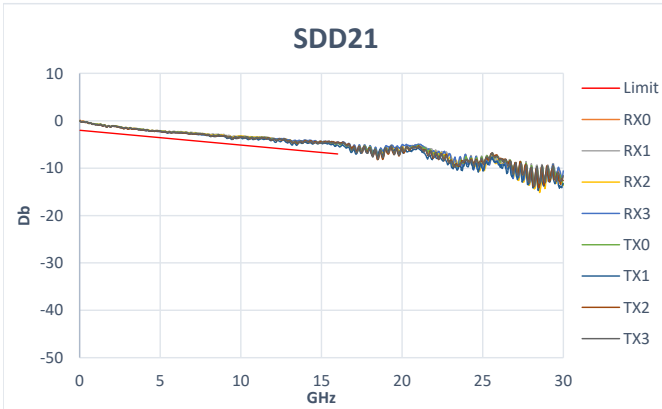


#### Return Loss SDD22

FRQ.(GHz)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
0-4G		-12.39	-13.72	-13.70	-12.53	-11.96	-13.51	-13.47	-13.10
4-16G		-8.95	-8.31	-7.95	-8.62	-9.14	-8.98	-8.97	-8.18
16-24G		-4.78	-4.66	-4.58	-5.15	-6.29	-4.75	-4.53	-4.78
Result									

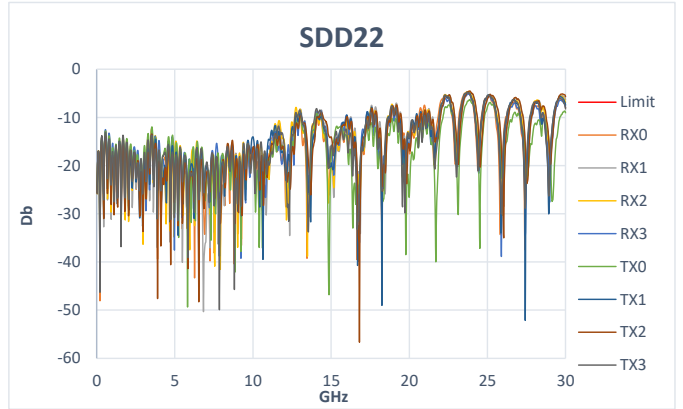

#### Differential To CommMod Conversion SCD21

FRQ.(GHz)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
0-30G	MAX -18dB	-27.29	-28.95	-22.54	-24.65	-26.19	-28.32	-26.54	-28.16
Result		Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

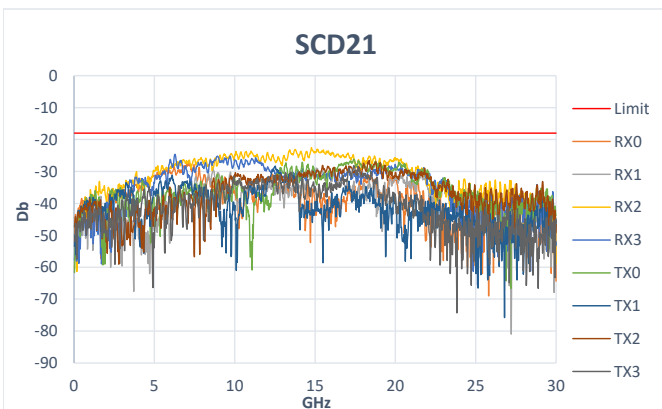

#### Differential To CommonMod Return Loss SCD22

FRQ.(GHz)	Limit(dB)	RX0	RX1	RX2	RX3	TX0	TX1	TX2	TX3
20M	-26.00	-53.04	-44.26	-51.45	-54.72	-49.64	-50.37	-53.34	-55.87
8G	-10.00	-30.09	-18.98	-31.76	-22.40	-14.10	-35.95	-20.13	-33.31
24G	-10.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Result		Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

