The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliance.

NOTE:
1. THE CABLE ASSEMBLY SHALL BE MEET RoHS2.0 COMPLIANT.
   该产品通过RoHS2.0认证.
2. THE CABLE ASSEMBLY SHALL MEET BELOW IMPENDANCE REQUIREMENT:
   TERMINATION AREA: 85±15% OHMS, CABLE ABSOLUTE AREA: 85±10% OHMS.
   该产品满足下面阻抗特性：接触区域85±15% 欧姆，线材为85±10% 欧姆.
3. ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE Gen3 INDUSTRIAL STARDAND.
   电气和机械特性遵循PCIE Gen3工业标准.

REVISIONS					
ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
REV.	AX4	CHANGE PIN DEFINE	HANK	KASUN	07/26/2017
	AX5	CHANGE PIN DEFINE	HANK	KASUN	07/28/2017
	AX6	CHANGE PIN DEFINE AND LENGTH	HANK	KASUN	08/04/2017
	AX7	CHANGE LENGTH	JUSTIN	KASUN	09/11/2017

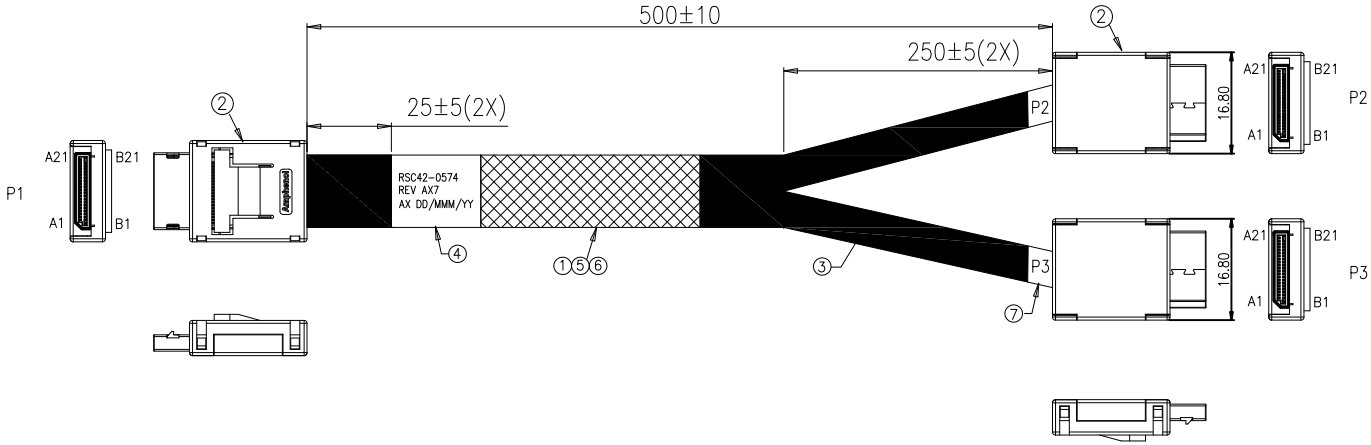

P1					
A1	RESERVED		B1	RESERVED	P2
A2	GROUND		B2	GROUND	
A3	PERp0		B3	PETp0	
A4	PERn0		B4	PETn0	
A5	GROUND		B5	GROUND	
A6	PERp1		B6	PETp1	
A7	PERn1		B7	PETn1	
A8	GROUND		B8	GROUND	
A9			B9		
A10			B10		
A11	GROUND		B11	GROUND	
A12	VSP/REFCLK		B12	VSP/REFCLK	
A13	VSP/REFCLK		B13	VSP/REFCLK	
B2	GROUND		A2	GROUND	
B3	PETp0		A3	PERp0	
B4	PETn0		A4	PERn0	
B5	GROUND		A5	GROUND	
B6	PETp1		A6	PERp1	
B7	PETn1		A7	PERn1	
B8	GROUND		A8	GROUND	
B9	I2C/SMBUS		A9	I2C/SMBUS	
B10	I2C/SMBUS		A10	I2C/SMBUS	
B12			A12		
B13			A13		
A21	RESERVED		B21	RESERVED	
B1	RESERVED		B1	RESERVED	P3
A14	GROUND		B2	GROUND	
A15	PERp2		B3	PETp0	
A16	PERn2		B4	PETn0	
A17	GROUND		B5	GROUND	
A18	PERp3		B6	PETp1	
A19	PERn3		B7	PETn1	
A20	GROUND		B8	GROUND	
B11	GROUND				
B14	GROUND		A2	GROUND	
B15	PETp2		A3	PERp0	
B16	PETn2		A4	PERn0	
B17	GROUND		A5	GROUND	
B18	PETp3		A6	PERp1	
B19	PETn3		A7	PERn1	
B20	GROUND		A8	GROUND	
B21	RESERVED		B21	RESERVED	

WIRE TABLE

LABEL DETAIL

ITEM	P/N	DESCRIPTION	QTY
7	HMLSB07301	LABEL:Synthetic Paper,7*30MM,WHT,HF	2
6	H0330232XX	WIRE,32AWG,UL3302,7/0.08,OD0.45,HF,VW-1,NO MARKING	A/R
5	HMTBD00501	EXPANDO TUBE:OD=5MM,BLACK,VW-1,HF	A/R
4	HMLSB57262	LABEL:57*26MM,BLANK,WHT,R2,HF	1
3	HMMTP00012	ACETATE TAPE:W=1INCH,HF	A/R
2	OCL42-0003	Minilink,42POS,CONNECTOR, STR WITH ACTIVE LATCH	3
1	RWSS320006	SAS CBL:32#2C+2D+AM+HM,OD0.65*1.56,BLU,85Ω,VW-1	A/R

GENERAL TOLERANCES	
.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing.

DRAWN:	NATHAN CAO	DATE: 09/11/2017
CHECKED:	JUSTIN OU	DATE: 09/11/2017
APPROVED:	KASUN LI	DATE: 09/11/2017

TITLE:
SC P/N:RSC42-0574
OCULINK 4X STR TO STR

DWG. No.: RML42-0574

SCALE: NONE | SHEET 1 OF 2
UNIT: MM | SIZE: A4 | REV.: AX7

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliance.

REVISIONS					
ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
REL.					

LABEL 2

PN: RSC42-0574/RML42-0574

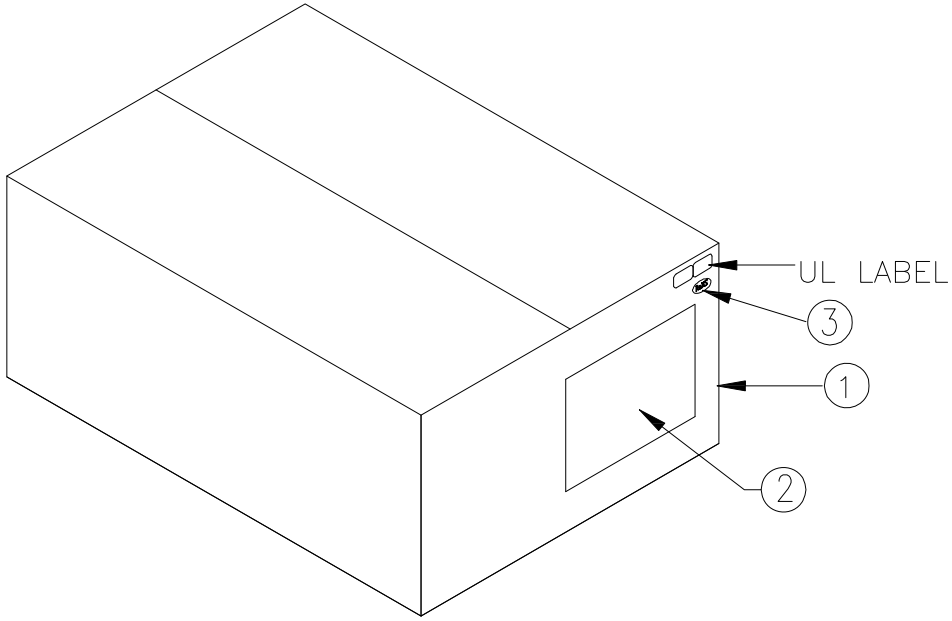



LABEL 3

ITEM	PART NUMBER	DESCRIPTION	Q'TY
3	RMLSW30201	RoHS LABEL:30*20MM, LABEL5 INFO	1
2	RMLSB00401	LABEL3:100*40MM,WHT,BLANK,R2	1
1	RMBCTN0019	CARTON:590*240*200MM E TYPE	1

GENERAL TOLERANCES	
.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing.

DRAWN:	NATHAN CAO	DATE: 09/11/2017
CHECKED:	JUSTIN OU	DATE: 09/11/2017
APPROVED:	KASUN LI	DATE: 09/11/2017

TITLE:
SC P/N:RSC42-0574
OCULINK 4X STR TO STR

DWG. No.: RML42-0574

SCALE: NONE | SHEET 2 OF 2
UNIT: MM | SIZE: A4 | REV.: AX7