



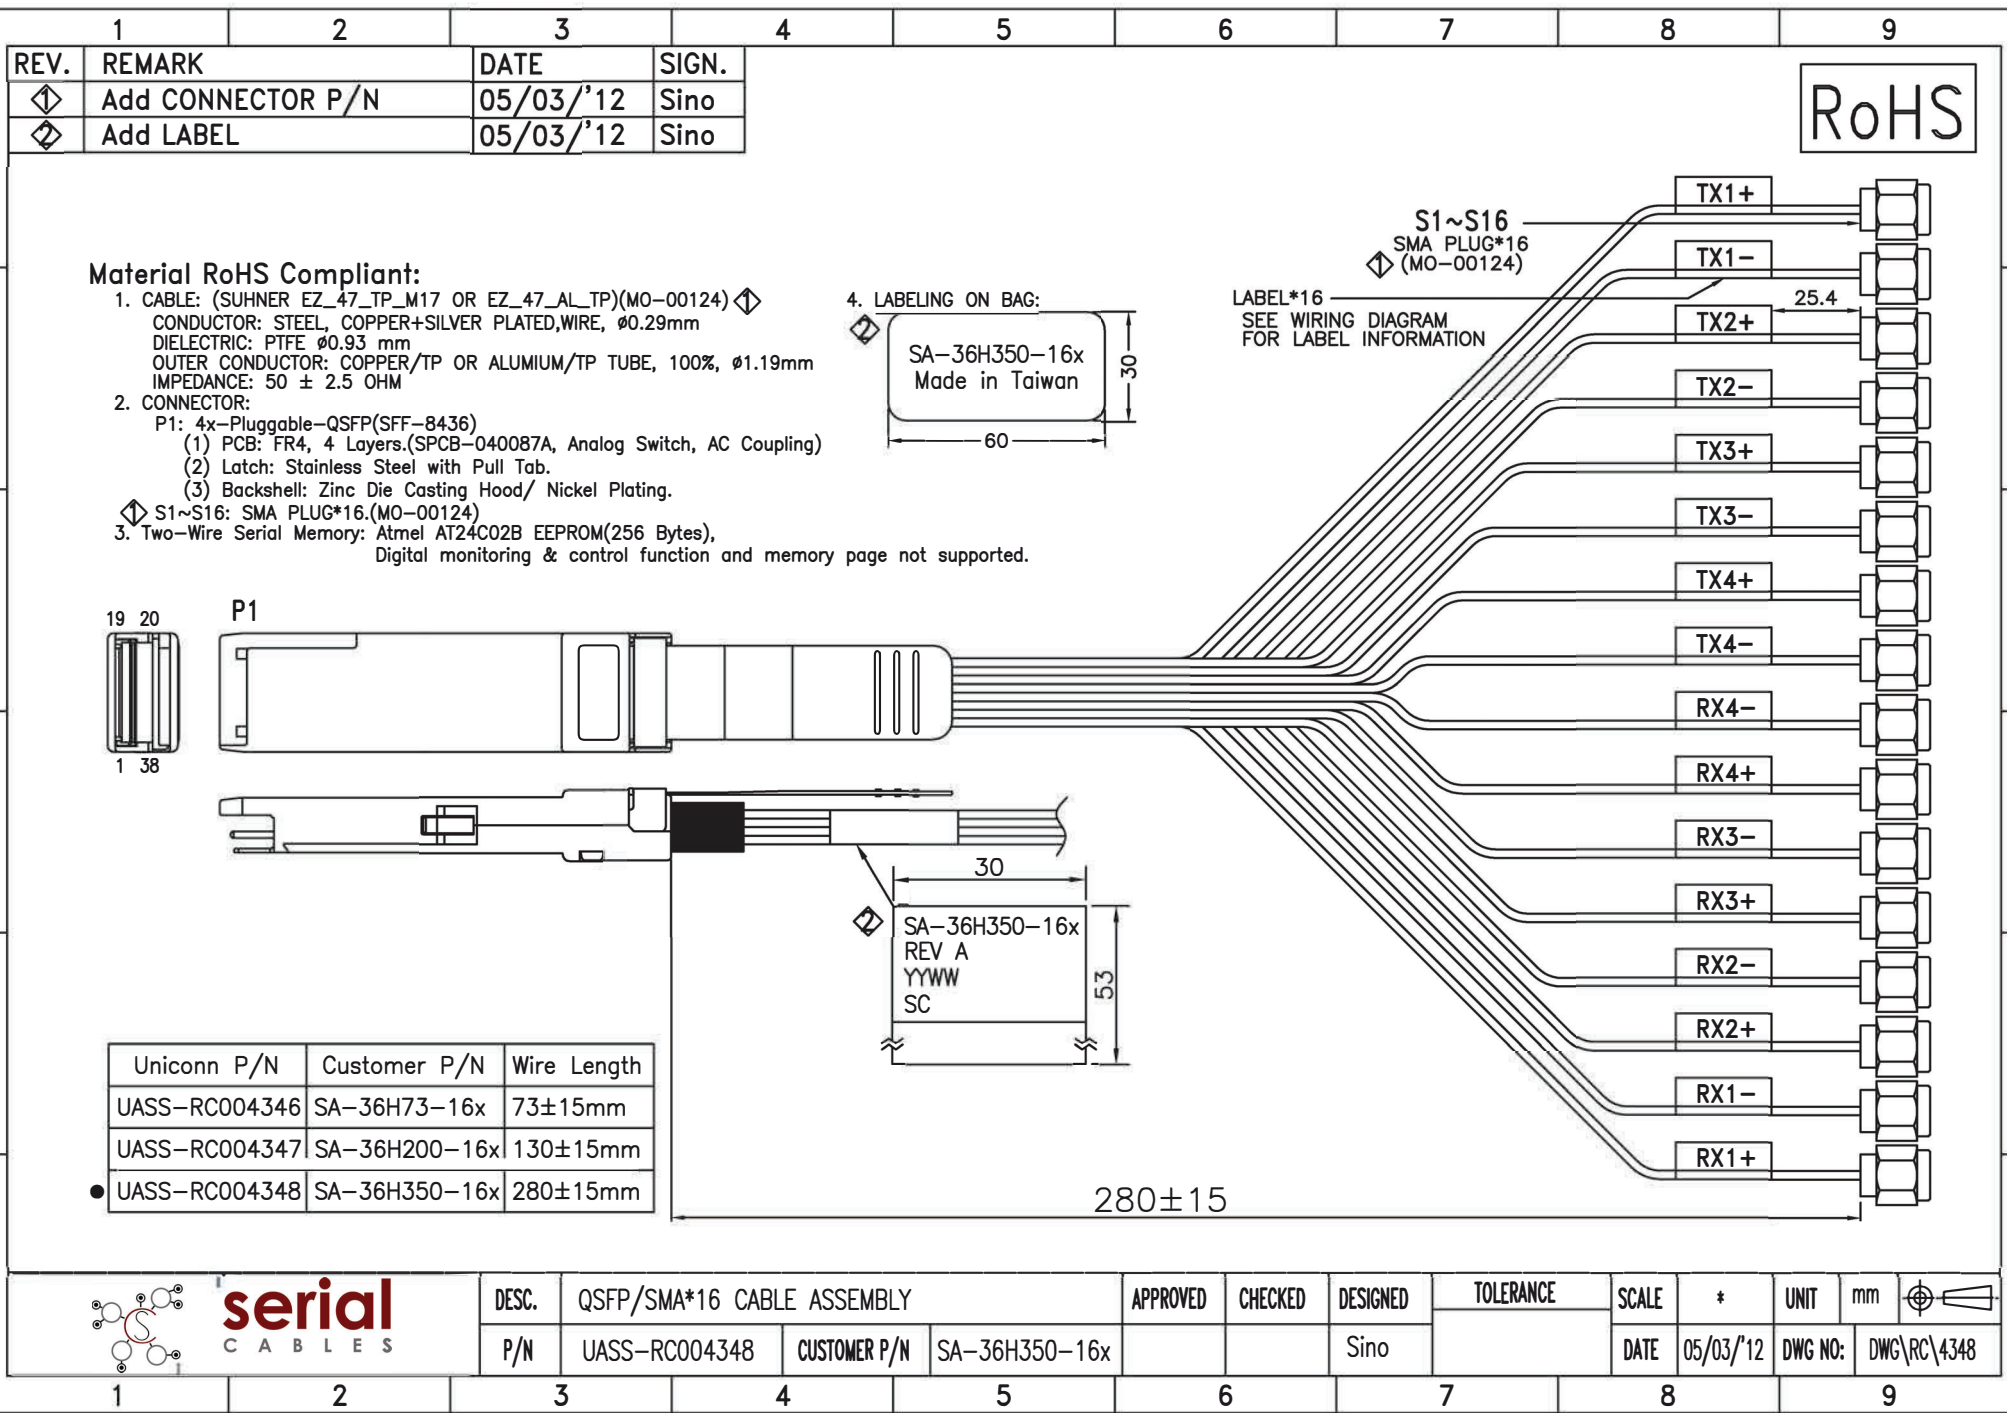

REV.	REMARK	DATE	SIGN.
1	Add P/N, REVISE LENGTH	10/22/'12	Sino

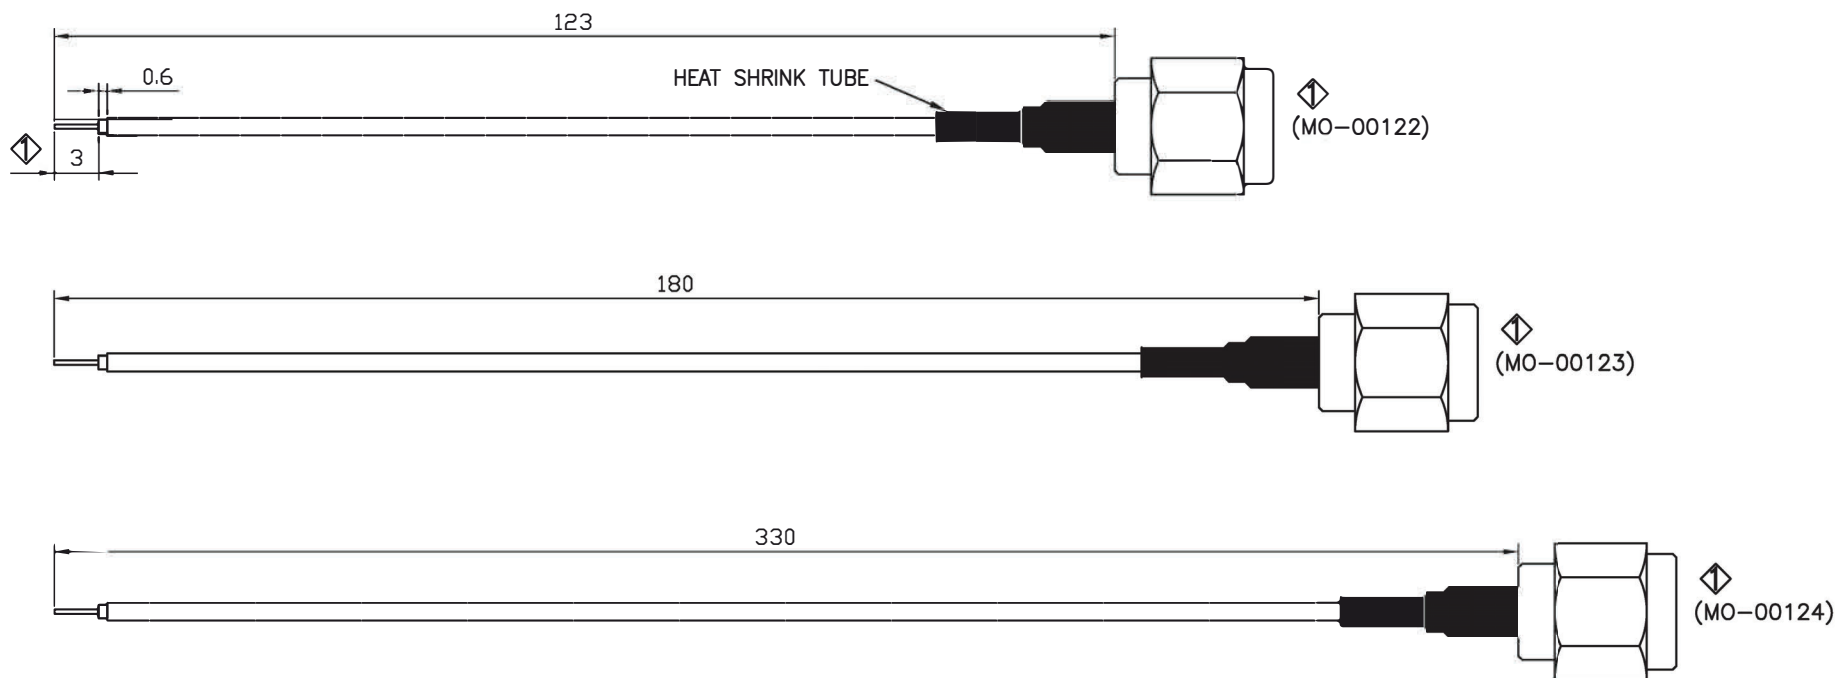

1. CABLE: (SUHNER EZ_47_TP_M17 OR EZ_47_AL_TP)
 CONDUCTOR: STEEL, COPPER+SILVER PLATED,WIRE, $\phi 0.29\text{mm}$
 DIELECTRIC: PTFE $\phi 0.93\text{ mm}$
 OUTER CONDUCTOR: COPPER/TP OR ALUMIUM/TP TUBE, 100%, $\phi 1.19\text{mm}$
 IMPEDANCE: $50 \pm 2.5\text{ OHM}$

2. CONNECTOR: SMA PLUG
 3. ASSEMBLED CABLE+CONNECTOR IMPEDANCE: $50 \pm 2.5\text{ OHM}$



serial
C A B L E S

DESC.	QSFP/SMA*16 CABLE ASSEMBLY
P/N	UASS-RC004348
CUSTOMER P/N	

APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	DATE	DWG NO:	DWG\RC\4348
		justin						10/22/'12		