
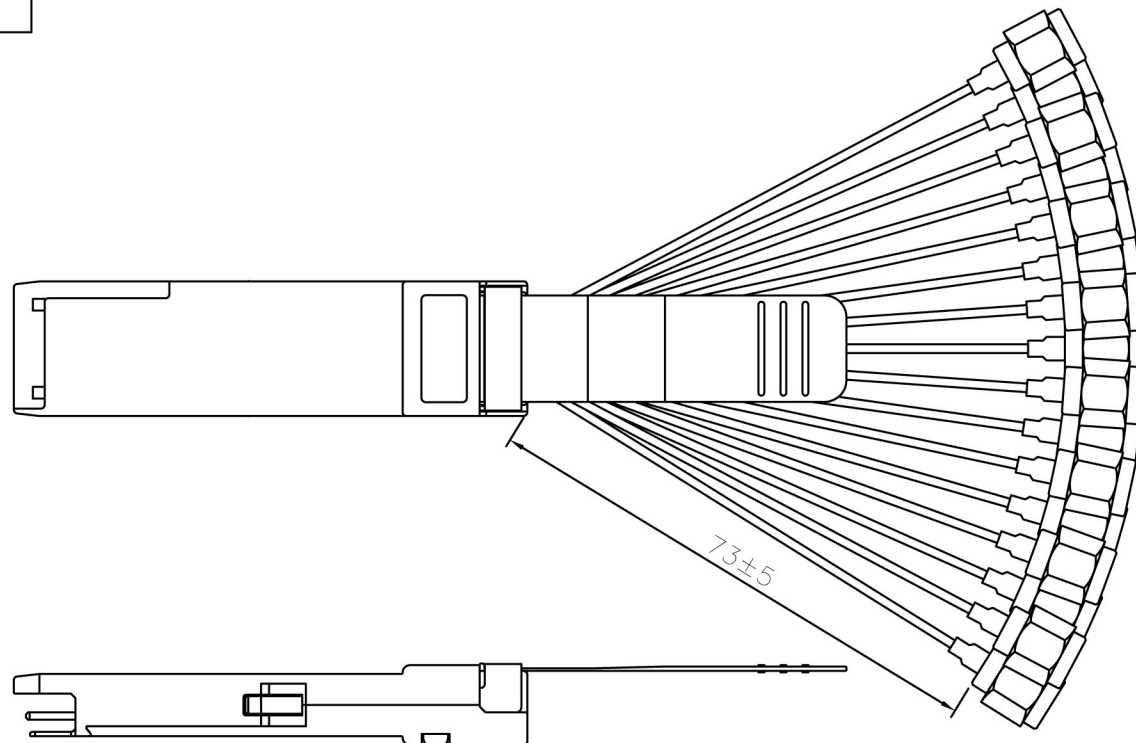




1. CABLE: (SUHNER)
CONDUCTOR: STEEL, COPPER+SILVER PLATED,WIRE, $\phi 0.29\text{mm}$
DIELECTRIC: PTFE $\phi 0.93\text{ mm}$
OUTER CONDUCTOR: COPPER/TP OR ALUMIUM/TP TUBE, 100%, $\phi 1.19\text{mm}$
IMPEDANCE: $50 \pm 2.5\text{ OHM}$
2. CONNECTOR:
P1: 4x-PLUGGABLE-QSFP(SFF-8436)
(1) PCB: FR4, 4 LAYERS.(SPCB-040068A, AC COUPLING)
(2) LATCH: STAINLESS STEEL WITH PULL TAB.
(3) BACKSHELL: ZINC DIE CASTING HOOD/ NICKEL PLATING.
S1~S16: SMA PLUG*16.
3. TWO-WIRE SERIAL MEMORY: ATMEL AT24C02B EEPROM(256 Bytes),

Serial Cables, LLC

QSFP/SMA*16 CABLE ASSEMBLY

B-3740

justin

*

11/30/'10

mm

DWG\B\3740