


1. CABLE:
 CONDUCTOR: 30AWG 7/38 SILVER COPPER.
 INSULATION: FLUOROCARBON POLYMER.
 BRAID SHIELD: 5 ENDS 44 AWG TINNED COPPER, 92% MIN. COVERAGE.
 JACKET: FEP BLACK.
 DIAMETER: 0.052" (1.32 mm) NOMINAL.
2. CONNECTOR:
 P1: Mini SAS 4x CABLE PLUG – 26CKT CONNECTOR.(SFF-8088)
 (1) P.C.B: FR4, 4 LAYERS
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) WITH EXTERNAL UNIVERSAL KEY
 S1~S16: SMA PLUG*16.



Mini SAS 4x(P1)		SMA(S1~S16)
PIN	SIGNAL	LABEL INFO.
A2	RX0+	RX0+
A3	RX0-	RX0-
A5	RX1+	RX1+
A6	RX1-	RX1-
A8	RX2+	RX2+
A9	RX2-	RX2-
A11	RX3+	RX3+
A12	RX3-	RX3-
B2	TX0+	TX0+
B3	TX0-	TX0-
B5	TX1+	TX1+
B6	TX1-	TX1-
B8	TX2+	TX2+
B9	TX2-	TX2-
B11	TX3+	TX3+
B12	TX3-	TX3-
GND Group A1,A4,A7,A10,A13, B1,B4,B7,B10,B13.		CABLE BRAID

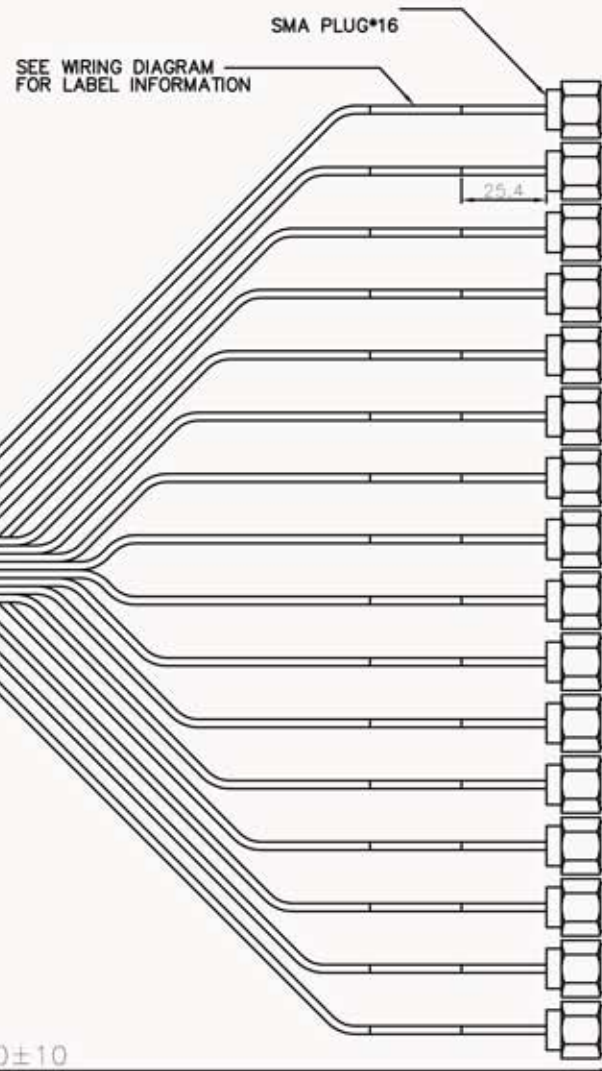

P/N: SA-88SMA-T

Desc. : MiniSAS (SFF-8088) - SMA Test Cable