


REV.	REMARK	DATE	SIGN.
①	REVISE CABLE	11/23/'10	Sino
②	CHANGE CONNECTOR	12/08/'10	Sino


RoHS

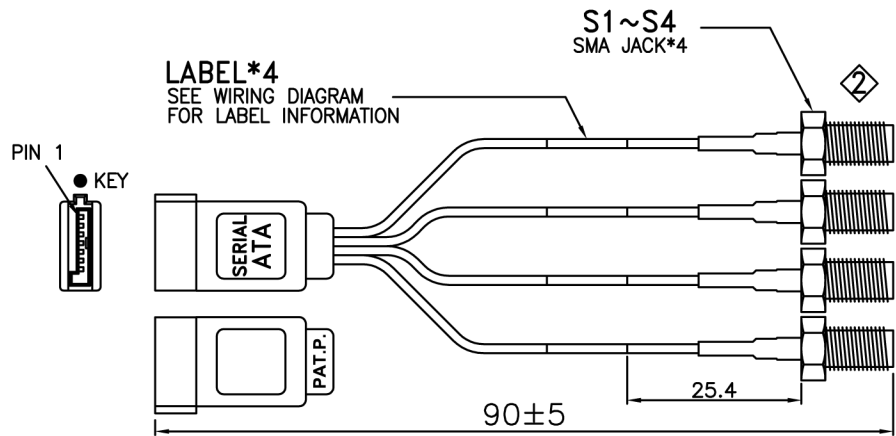

Material RoHS Compliant:

- ① 1. CABLE: (SUHNER EZ_47_TP_M17 OR EZ_47_AL_TP)
CONDUCTOR: STEEL, COPPER+SILVER PLATED,WIRE, $\phi 0.29\text{mm}$
DIELECTRIC: PTFE $\phi 0.93\text{ mm}$
OUTER CONDUCTOR: COPPER/TP OR ALUMIUM/TP TUBE, 100%, $\phi 1.19\text{mm}$
IMPEDANCE: $50 \pm 2.5\text{ OHM}$
2. CONNECTOR:
P1: SATA INTERNAL CABLE RECEPTACLE W/O LATCH.
② S1~S4: SMA JACK*4.

3. LABELLING ON BAG:

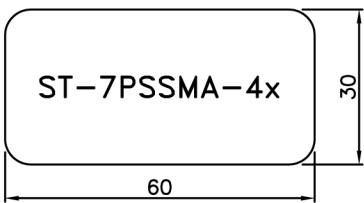

4. WIRING DIAGRAM

SATA 7P(P1)		SMA(S1~S4)	
PIN	SIGNAL		LABEL INFO.
2	A+		A+
3	A-		A-
5	B-		B-
6	B+		B+
1,4,7	GND		CABLE BRAID

Serial Cables, LLC

DESC.	SATA 7P/SMA*4 CABLE ASSEMBLY			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	B-3014	CUSTOMER P/N	ST-7PSSMA-4x			Sino		DATE	12/08/'10	DWG NO:	DWG\B\3014	