


REV.	REMARK	DATE	SIGN.
◇	CHANGE CONNECTOR	10/01/'13	Sino

RoHS

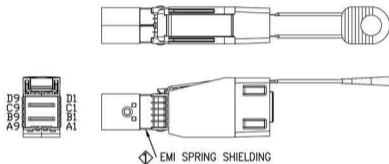

◇ EMI SPRING SHIELDING


**MATERIAL RoHS COMPLIANT:**

1. CONNECTOR:

- (1) P.C.B: 6 LAYERS, GOLD PLATING ON CONTACT PADS.
- (2) LATCH: STAINLESS STEEL
- (3) BACKSHELL: ZINC DIE CASTING HOOD/ NICKEL PLATING
- (4) PULL TAB: NYLON UL94V-0, COLOR: BLUE.

◇ (5) EMI SPRING SHIELDING


2. LABELING ON BAG:



PIN	SIGNAL
B4	RX0+
B5	RX0-
A4	RX1+
A5	RX1-
B7	RX2+
B8	RX2-
A7	RX3+
A8	RX3-
C8	TX3-
C7	TX3+
D8	TX2-
D7	TX2+
C5	TX1-
C4	TX1+
D5	TX0-
D4	TX0+

GND GROUP :  
A3,A6,A9,B3,B6,B9  
C3,C6,C9,D3,D6,D9

PAD	SIGNAL
A1	Reserved
A2	IntL
B1	Vact
B2	ModPrsL
C1	SCL
C2	SDA
D1	Vact
D2	Vman



DESC.	Mini SAS HD 4x Loopback Adapter	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	◇
P/N	UASS-AD000187	CUSTOMER P/N	SA-AD-4444-LB	Sino	*	DATE	10/01/'13	DWG NO:	DWG\AD\187	